



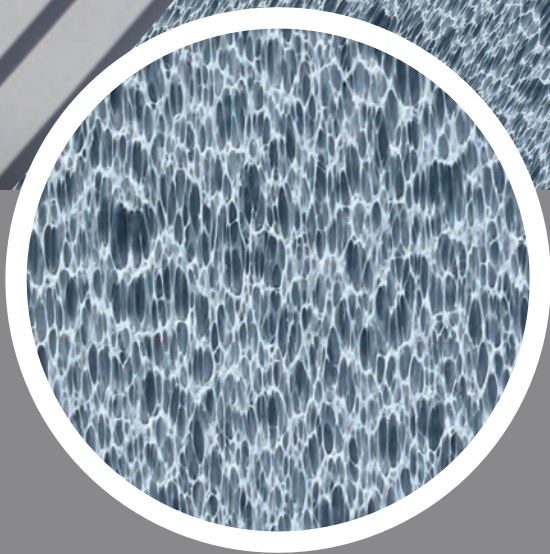

# G.A.P. WaterGuard SA MetalGuard HT

Self-Adhered SBS Modified High-Temperature Metal Underlayment

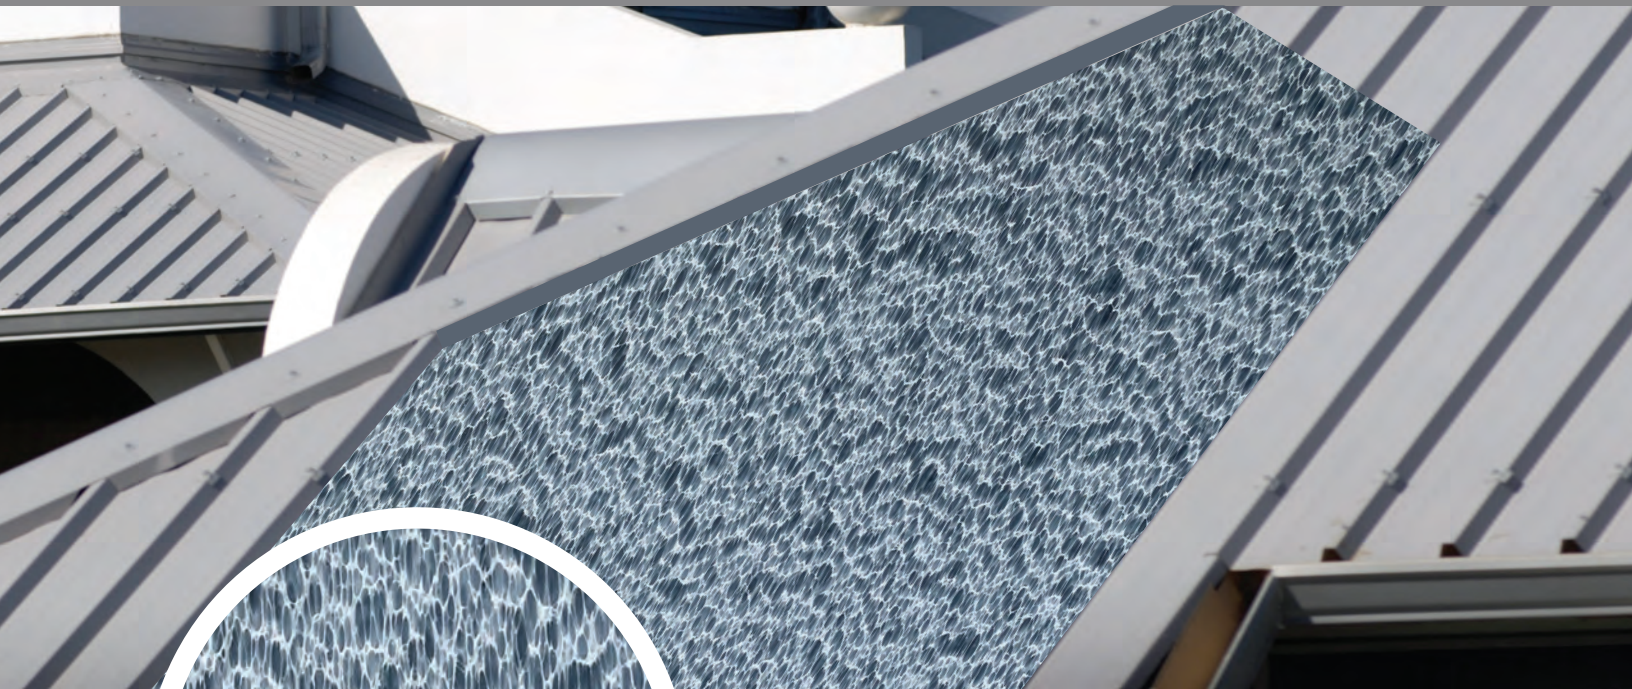

*Ideal for  
mechanically-attached  
metal roofs and  
concrete and clay tiles*

# ABOUT G.A.P. ROOFING, INC.

## Our History

Est. 1990

### OUR COMPANY

G.A.P. Roofing, Inc. (G.A.P.) was founded in 1990 by the Passmore family with multiple generations of Passmores leveraging their time, energy, sweat, tears, and dollars to invest in the idea of manufacturing roofing underlayment products for hard working Americans just like them. The Passmores relied on their extensive background in manufacturing roofing materials to create Great Asphalt Products (G.A.P.), in Pryor, Oklahoma.

### OUR MISSION

Since its inception, G.A.P. has expanded adding two more manufacturing facilities to service North America. Manufacturing products to include saturated felt, roll roofing materials, underlayments, self-adhered modified bitumen underlayments and self-adhered base and cap sheets, G.A.P. is focused on producing the best quality roofing materials and providing the best-in-class customer experience.

**For more information, visit [www.gaproofing.us](http://www.gaproofing.us)**



# ABOUT OUR PRODUCT

## G.A.P. WaterGuard SA MetalGuard HT

Self-Adhered SBS Modified High-Temperature Metal Underlayment

### DESCRIPTION

SA MetalGuard HT features a dual technology SBS rubberized high-temperature formulation Ideal for metal & tile roofing and offers great wind-uplift properties, eave, valley and ice damming protection. It is temperature resistant to 265°F.

The bottom coat is an aggressive asphalt-based adhesive, protected with a factory applied, split-release film that is removed prior to installation. SA MetalGuard HT has an overall thickness of 60-mils (ASTM D1777) and a width of 39 3/8" and a length of 61'.

SA MetalGuard HT is manufactured in a 2 square roll, weighing approximately 60 lb./roll.

### FEATURES & BENEFITS


- + **Unique "textured" slip resistant surface**  
Greater feeling of safety and security while walking.
- + **Exceptional SBS rubberized adhesive backing**
- + **Unique modified bitumen formulation with wide temperature installation range and great nail/screw seal ability.**
- + **Highly pliable fiberglass mat reinforcement**  
Conforms easily to valleys, corners and angles.
- + **180-day UV exposure**  
Longer dry-in time and greater protection from temporary exposure.
- + **Made in North America with US standards**  
Assured performance, safe components and US quality standards.
- + **2 square roll**  
Easy to install and true coverage.
- + **Meets ASTM D1970, Florida Building Code, Miami-Dade and Texas**  
No concerns with code enforcement and significant "body" for assured performance and nail sealability.

# TECHNICAL INFORMATION

APPROVED  
SUBSTRATES

**G.A.P. WaterGuard SA MetalGuard HT can be applied over:**


- Plywood
- Felt
- Asphaltic surfaces such as:  
Primers, mastics and asphaltic base-ply sheets

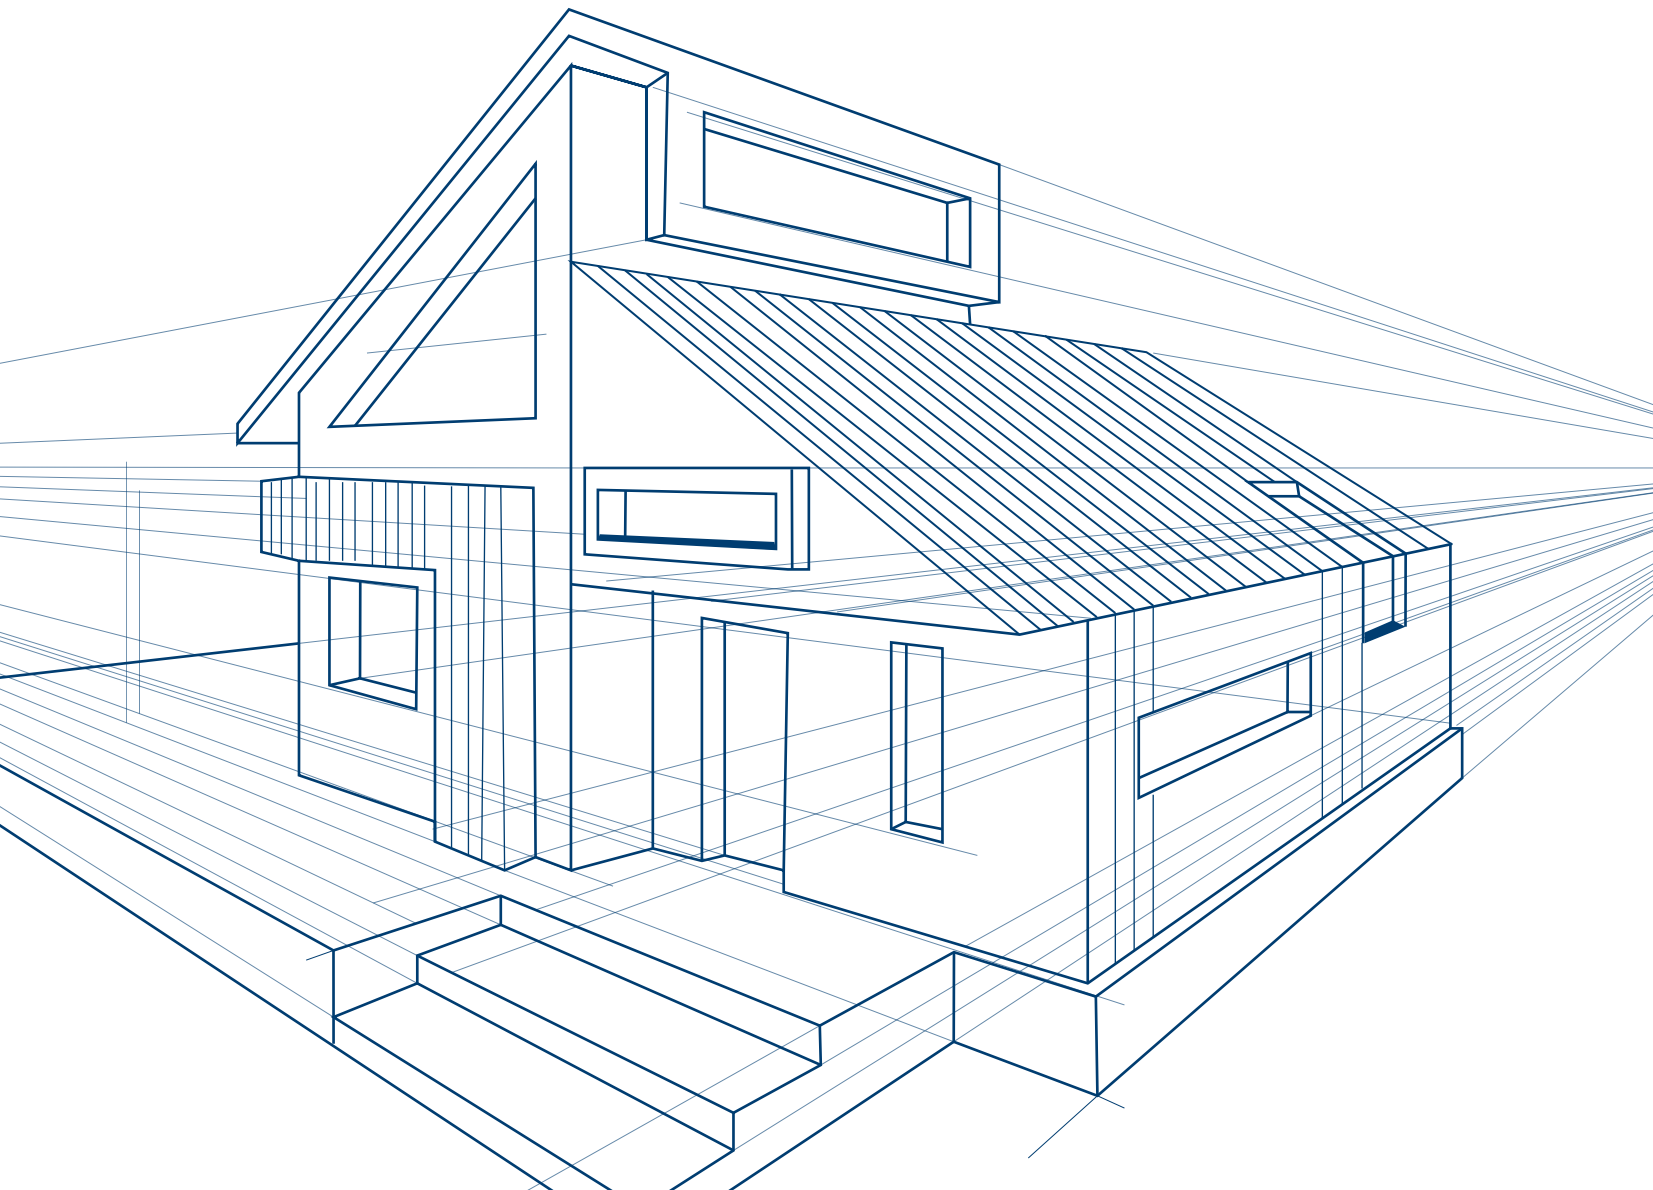

# TECHNICAL INFORMATION

## G.A.P. WaterGuard SA MetalGuard HT

Self-Adhered SBS Modified High-Temperature Metal Underlayment



Governmental Code Compliance	FBC 22853.1 (HVHZ Miami & Dade Counties)	
Physical Properties	ASTM D1970	
Rolls/Pallet	28	
Weight/Roll	60 lbs	
Width	39 3/8"	
Length	61'	
Thickness	60-mils (nominal)	
Coverage	2 squares	
Perm Rating	<0.1 U.S. perms	
UV Exposure	180 days	
Adhesion to Plywood, Min at 40°F	2.0 lbf/ft width	Pass
Adhesion to Plywood, Min at 75°F	12.0 lbf/ft width	Pass
Flexibility Temperature	-20°F	Pass
Moisture Vapor Permeance	<0.1 U.S. perms	Pass
Sealability Around Nail	No leaks	Pass
Waterproof Integrity After Low-Temp Flexibility	No leaks	Pass
Waterproof Integrity of Lap Seam	No leaks	Pass
Packaging	Shrink Bag	

# ABOUT THE WATERGUARD FAMILY

## Why Choose Us

### Waterguard Products



G.A.P. Roofing, Inc. manufactures a full line of self-adhered roof underlayments for a variety of roof coverings. All of the G.A.P. WaterGuard products are SBS modified, reinforced underlayments that feature an aggressive SBS rubberized adhesive resulting in consistent nail/screw sealability, and has a strong split release poly liner.

Manufactured in the USA, all G.A.P. WaterGuard underlayments come in 2 square rolls for easy handling on the job.



Available in Rain & Ice, TileGuard HT and MetalGuard HT formulations, WaterGuard self-adhered underlayments are designed for steep slope installations.

WaterGuard products feature a dual technology SBS rubberized high-temperature formulation and are used as a primary roofing underlayment protection.

- WaterGuard Self Adhered MetalGuard HT
- WaterGuard Self Adhered TileGuard HT
- WaterGuard Self Adhered Cap Sheet
- WaterGuard Self Adhered Fiberglass Base Sheet
- WaterGuard Self Adhered Rain & Ice



# PRODUCT SELECTION

## G.A.P. WaterGuard

### PRODUCT DETAILS

PRODUCT	USE	SURFACE
WaterGuard Self Adhered MetalGuard HT	Tile, Metal or Shingle	Polypropylene
WaterGuard Self Adhered TileGuard HT	Tile, Metal or Shingle	Polyester Fleece Fabric
WaterGuard Self Adhered Cap Sheet (Polyester or Fiberglass mat)	Cap Sheet	Granular Surface
WaterGuard Self Adhered Fiberglass Base Sheet	Base Sheet	Polyethylene
WaterGuard Self Adhered Rain & Ice	Shingle	Fine Granular Surface

### CONTACT US TODAY!

Visit us: [www.gaproofing.us](http://www.gaproofing.us)

Call us: 918.825.5200

E-mail us: [info@gaproofing.us](mailto:info@gaproofing.us)



**G.A.P. ROOFING, INC.**

**Pryor, OK**

4444 Hunt Street  
Pryor, OK 74361

**Shafter, CA**

G.M.C. Roofing  
6400 S Zerker Rd.  
Shafter, CA 93263

**Jasper, FL**

G.A.P. Roofing of FL, LLC  
12120 SE County Rd 137  
Jasper, FL 32052

918.825.5200  
info@gaproofing.us  
www.gaproofing.us

